


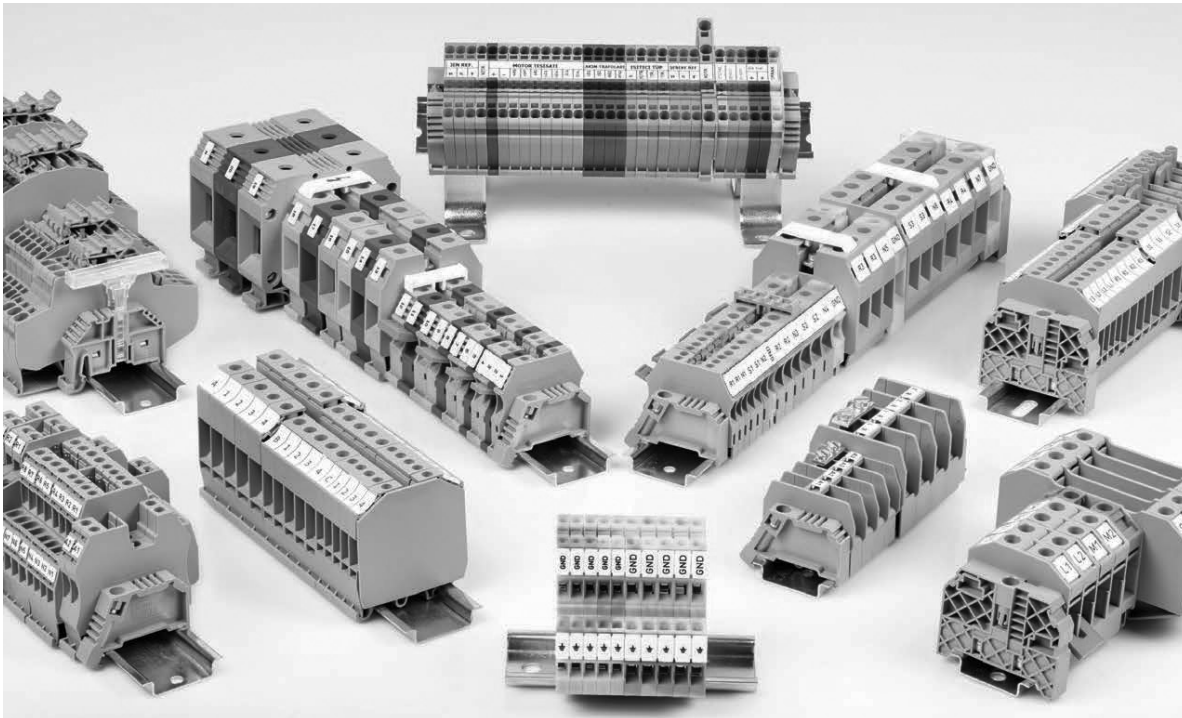


คุณสมบัติ

- เป็นที่พักสายทำให้สะดวกและง่ายต่อการตรวจสอบระบบไฟฟ้า
- ทำให้ตู้คอนโทรลมีความเป็นระเบียบเรียบร้อย
- วัสดุทำจากพลาสติกประเภทโพลีไมย 6.6 ทนต่อความร้อน (Max 120°C) และไม่ติดไฟ
- รองรับกับการเข้าสายได้หลายขนาด


AVK SERIES TERMINALS

AVK Series Screw Connection Rail Terminals provide the whole range of cross sections from 2.5 up to 240 mm². Terminals accessories like Cross Connection, End Plate, Comb Connector are available. Special Marking solutions for each cross section can be provided by Plotter labeling. The color of products can be selected from the color table

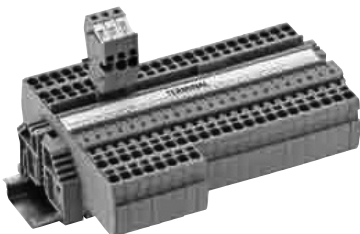

PYK SERIES TERMINALS

PYK Series Practical Spring Clamp Terminals provide 1,5 10 mm² cross-section range. Screwdriver is not necessary to install wire into the terminal block. Are suitable for usage with or without ferrules. So that to make connection, it is enough to push the cable into the terminal, PYK series provides more practical mounting. Terminals accessories like End Plates and Cross Connections, make the mounting process faster like in Test Terminals. Special Marking solutions for each cross section can be provided by Plotter labeling and with marking strip printed on Thermal printer, using Klemark Software. PYK Test Terminals, produced with the test and control aim, can be labeled with thermal marking strips and standard Dekafix markings.






PYK SERIES DISCONNECT TERMINALS

Knife Disconnect System, enables Practical Spring Clamp Disconnect Terminals to switch energy in the system. Marking can be done with marking strip printed on Thermal printer, using Klemark Software.




ISO 9001 - ISO 14001

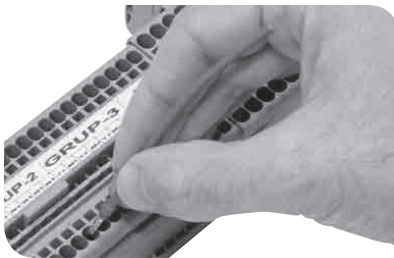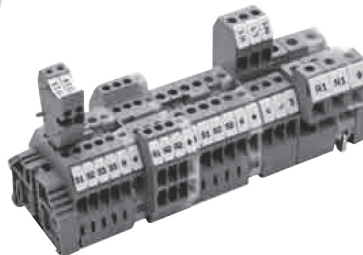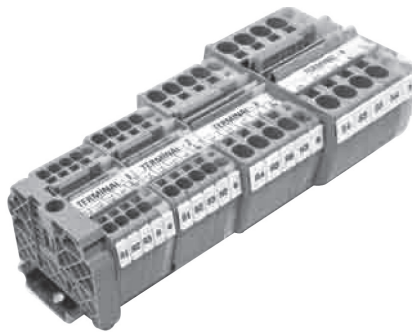


PYK SERIES EARTH TERMINALS

PYK Series Earth Terminals provides 1,5 10 mm² cross-section range. Screwdriver is not necessary to mount the terminal block on the rail. Mounting is more time-saving and practical. Yellow-Green color of the insulation body provides easy identification out of other Terminals. Side-by-side mounting on DIN-Rail with feed-through terminals for same cross-sections is possible with good visual effect. Special Marking solutions for each cross section can be provided by Plotter labeling and with marking strip printed on Thermal printer, using Klemark Software.









ASK SERIES FUSE TERMINALS





MVK SERIES MINI TERMINALS

การติดตั้ง






TERMINAL AVK-SERIES (แบบสกู)

Terminal	รุ่น	รหัส	ขนาด (W x L x H) mm.	Rating Current (A)	Rating Voltage (V)	ขนาดสาย mm ²	บรรจุกล่องละ(ตัว)
old products 	AVK 2.5	304 120	5 x 44.20 x 44.40	24	750	2.5	100
	AVK 4	304 130	6 x 44.20 x 44.40	32	750	4	100
	AVK 6	304 140	8 x 44.20 x 44.40	41	630	6	100
	AVK 10	304 150	10 x 44.20 x 44.40	57	630	10	100
	AVK 16	304 160	12 x 51.00 x 55.40	76	750	16	50
	AVK 70	304 193	22 x 74.00 x 67.50	192	-	70	10
End Plate	รุ่น	รหัส	ใช้กับ Terminal รุ่น				บรรจุกล่องละ(ตัว)
	NPP/AVK 2.5-10	444 120	AVK 2.5				100
	NPP/AVK 2.5-10	444 120	AVK 4				100
	NPP/AVK 2.5-10	444 120	AVK 6				100
	NPP/AVK 2.5-10	444 120	AVK 10				100
	NPP/AVK 16	444 160	AVK 16				100
Terminal	รุ่น	รหัส	ขนาด (W x L x H) mm.	Rating Current (A)	Rating Voltage (V)	ขนาดสาย mm ²	บรรจุกล่องละ(ตัว)
new products 	AVK 2.5 RD	304 200	5 x 44.20 x 44.60	24	750	2.5	100
	AVK 4 RD	304 210	6 x 44.20 x 44.60	32	750	4	100
	AVK 16 RD	304 240	12 x 52.80 x 58.60	76	750	16	50
	AVK 35 RD	304 250	16 x 52.80 x 58.70	125	750	35	40
End Plate	รุ่น	รหัส	ใช้กับ Terminal รุ่น				บรรจุกล่องละ(ตัว)
	NPP/AVK 2.5-10	444 120	AVK 2.5 RD				100
	NPP/AVK 2.5-10	444 120	AVK 4 RD				100
	NPP/AVK 16 RD	444 170	AVK 16 RD				100

Cross Connection				รุ่น	รหัส	ใช้กับ Terminal รุ่น	บรรจุกล่องละ (ตัว)
 UK 2.5 / 2	 UK 2.5 / 3	 UK 2.5 / 4	 UK 2.5 / 10	UK 2.5 / 2	474 122	AVK 2.5	25
				UK 2.5 / 3	474 123	AVK 2.5	20
				UK 2.5 / 4	474 124	AVK 2.5	15
				UK 2.5 / 10	474 129	AVK 2.5	5
 UK 4 / 2	 UK 4 / 3	 UK 4 / 4	 UK 4 / 10	UK 4 / 2	474 132	AVK 4	25
				UK 4 / 3	474 133	AVK 4	20
				UK 4 / 4	474 134	AVK 4	15
				UK 4 / 10	474 139	AVK 4	5
 UK 6 / 2	 UK 6 / 3	 UK 6 / 4	 UK 6 / 10	UK 6 / 2	474 142	AVK 6	25
				UK 6 / 3	474 143	AVK 6	20
				UK 6 / 4	474 144	AVK 6	15
				UK 6 / 10	474 149	AVK 6	5
 UK 10 / 2	 UK 10 / 3	 UK 10 / 4	 UK 10 / 10	UK 10 / 2	474 152	AVK 10	25
				UK 10 / 3	474 153	AVK 10	20
				UK 10 / 4	474 154	AVK 10	15
				UK 10 / 10	474 159	AVK 10	5
 UK 16 / 2	 UK 16 / 3	 UK 16 / 4	 UK 16 / 10	UK 16 / 2	474 162	PYK 16	25
				UK 16 / 3	474 163	PYK 16	20
				UK 16 / 4	474 164	PYK 16	15
				UK 16 / 10	474 169	PYK 16	5
 UK 35 / 2	 UK 35 / 3	 UK 35 / 4	 UK 35 / 10	UK 35 / 2	474 172	AVK 35 RD	25
				UK 35 / 3	474 173	AVK 35 RD	20
				UK 35 / 4	474 174	AVK 35 RD	15
				UK 35 / 10	474 179	AVK 35 RD	5

EARTH TERMINAL (เทอร์มินอลกราวด์แบบสกรู)

Terminal	รุ่น	รหัส	ขนาด (W x L x H) mm.	ขนาดสาย mm ²	บรรจุกล่องละ (ตัว)
	AVK 2.5 / 4 T	334 120	6 x 42.00 x 44.50	4	50
	AVK 6 / 10 T	334 140	10 x 42.00 x 44.50	10	20
Terminal	รุ่น	รหัส	ขนาด (W x L x H) mm.	ขนาดสาย mm ²	บรรจุกล่องละ (ตัว)
	AVK 16 T RD	334 200	12 x 52.80 x 58.70	16	50
	AVK 35 T RD	334 210	16 x 52.80 x 57.70	35	40
Terminal	รุ่น	รหัส	ขนาด (W x L x H) mm.	ขนาดสาย mm ²	บรรจุกล่องละ (ตัว)
	AVK 50 T	334 190	20 x 80.00 x 77.40	50	10

