







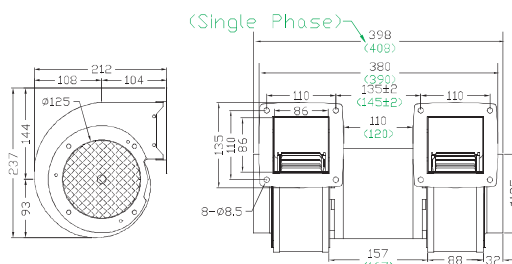


CY 125 M



The dimensions of the unidirectional windmills are shown in brackets.

CY 150 M

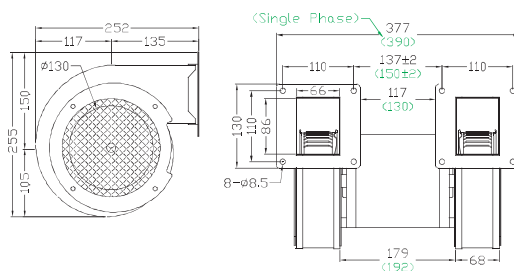

The dimensions of the unidirectional windmills are shown in brackets.

Specification

Mode	Rated Voltage	Frequency	Phase	Pole	Current	Power	Speed	Max. Air Flow			Max. Pressure			Weight
	V	Hz	ø	P	A	Watt/HP	R.P.M.	CMM	m3/hour	CFM	mmAq	inchAq	Pa	KG
CY 125M	110/220	50	1	2	4 / 2	1/2 HP	2930	19	1140	671	46	1.81	451	12.6
		60			5.0 / 2.5		3470	23.2	1392	819	66.5	2.62	652	
	220/380	50	3		2 / 1		2930	19	1140	671	46	1.81	451	11.6
		60			2 / 1		3470	23.2	1392	819	66.5	2.62	652	
CY 150M	110/220	50	1	2	5.0 / 2.5	3/4 HP	2900	17.6	1056	621	60	2.36	588	13
		60			7.6 / 3.8		3450	23	1380	812	85	3.35	834	
	220/380	50	3		2.5 / 1.5		2900	17.6	1056	621	60	2.36	588	
		60			2.5 / 1.5		3450	23	1380	812	85	3.35	834	