







TECHNICAL SPECIFICATION

Power Supply	110 VAC 50 Hz	220 VAC 50 Hz
Power consumption	13 Watt / 0.14 Amp	13 Watt / 0.10 Amp
Air Volume	31 m ³ /h 18 (CFM)	
Sound Level	30 dB(A)	
Ambient operation	60 °C	
Protection Degree	IP55	
Material	UL 94 ABS	
Size	115 x 115 x102.2 mm.	
Weight	0.24 g.	

DIMENSION



ใช้วัดขนาดตู้คอนโทรลในรุ่น
PMV115N และ PMF115N




ACCESSORIES




PMF - Size

Size	
115N	115x115 mm. ใช้กับ PMV 115N



CMA-001



CMA-002

DESCRIPTION

- Fan to ventilation heat for electrical cabinet with Filter pad for filter out the dust into electrical cabinet or control cabinet.
- Wind speed at 31 m³/h
- Saving installation time with Clips Lock installation and maintenance time of Flap-Open to pull a fan cover off to change filter easier.
- Shape is designed to be beautiful and thin that made installation smooth with cabinet surface.
- There are suck air in and blow air out.
- Protection IP54.

OPERATION


Cabinet Filter Fan is ventilation fan for exchange heat for electrical cabinet, control cabinet. There are suck air in and blow air out by designed to has beautiful shape cover. It made installation smooth with cabinet surface (Example picture A).

And it has strong, fast and easy installation with Clips-Lock by the proper design. The products material is flexible plastic which is difference from fan case that is solid and difficult to adhere so our fans do not vibrate (Example B).

Easy to change dust filters from our designed "Flap-Open" that user can pull the cover off and push it back in the same place (Example C).

Spring Terminals made wiring easier and fast (Example D).

Normally, heat ventilation the heat air will float from bottom to the top so cabinet filter fan should install on top of cabinet by cover with filter pad stick in below area for being ventilation the air come inside cabinet. (Exempl picture E).

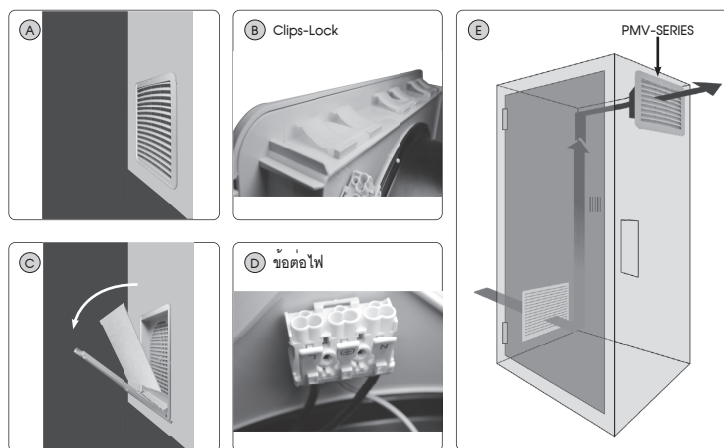

Accessory is Analog thermostat in Analog model CMA-001 and digital model CMA-002 for connect fan for long life saving by command fan to operate in temperature only.

ORDERING CODE

Size		Wind Direction		Power Supply Voltage	
115	115 x 115 mm.	A	Pull air in	110	110 VAC (For model PMV115N/PMV205N)
		P	Blow air out	220	220 VAC (All Model)



บริษัท ไพรมัส จำกัด (สาขา 00012)

เลขประจำตัวผู้เสียภาษี : 0105536011803

118/60 หมู่ที่ 18 ตำบลคลองหนึ่ง อำเภอคลองหลวง จังหวัดปทุมธานี 12120

118/60 Moo 18 Khlong Nueng, Khlong Luang, Pathum Thani 12120

Tel : 0-2693-7005 Fax : 02-147-4206 HotLine : 090-197-9601


E-mail : sales@primusthai.com, www.primusthai.com, www.pm.co.th



TECHNICAL SPECIFICATION (คุณสมบัติทางเทคนิค)

Power Supply	110/220 VAC 50/60 Hz
Power consumption	22 Watt / 0.18 Amp
Air Volume	130 m ³ /h 77 (CFM)
Sound Level	43 dB(A)
Ambient operation	60 °C
Protection Degree	IP54
Material	UL 94 ABS
Size	205 x 205 x 147.2 mm.
Weight	0.94 kg.

DIMENSION

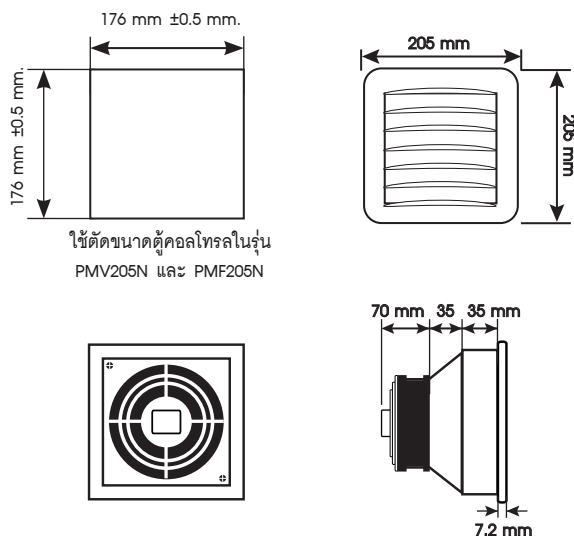


ACCESSORIES (อุปกรณ์เสริม)




PMF -

Size	
205N	205x205 mm. ใช้กับ PMV 205N



CMA-001



CMA-002

DESCRIPTION

- Fan to ventilation heat for electrical cabinet with Filter pad for filter out the dust into electrical cabinet or control cabinet.
- Wind speed at 130 m³/h
- Saving installation time with Clips Lock installation and maintenance time of Flap-Open to pull a fan cover off to change filter easier.
- Shape is designed to be beautiful and thin that made installation smooth with cabinet surface.
- There are suck air in and blow air out.
- Protection IP54.

OPERATION


Cabinet Filter Fan is ventilation fan for exchange heat for electrical cabinet, control cabinet. There are suck air in and blow air out by designed to has beautiful shape cover. It made installation smooth with cabinet surface (Example picture A).

And it has strong, fast and easy installation with Clips-Lock by the proper design. The products material is flexible plastic which is difference from fan case that is solid and difficult to adhere so our fans do not vibrate (Example B).

Easy to change dust filters from our designed "Flap-Open" that user can pull the cover off and push it back in the same place (Example C).

Spring Terminals made wiring easier and fast (Example D).

Normally, heat ventilation the heat air will float from bottom to the top so cabinet filter fan should install on top of cabinet by cover with filter pad stick in below area for being ventilation the air come inside cabinet. (Exempl picture E).

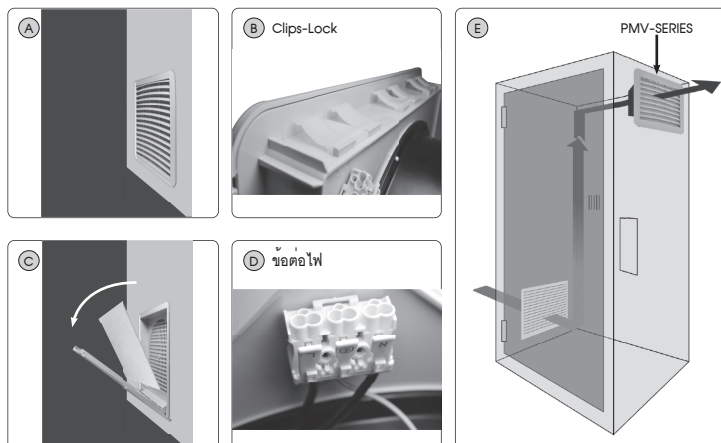

Accessory is Analog thermostat in Analog model CMA-001 and digital model CMA-002 for connect fan for long life saving by command fan to operate in temperature only.

ORDERING CODE


Size		Wind Direction	Power Supply Voltage
205	205 x 205 mm.	A Pull air in P Blow air out	110 110 VAC (For model PMV115N/PMV205N) 220 220 VAC (All Model)



TECHNICAL SPECIFICATION

Power Supply	220 VAC 50/60 Hz
Power Consumption	50 Watt / 0.25 Amp
Air Volume	511 m ³ /h 300 (CFM)
Sound Level	59 dB(A)
Ambient Operation	60 °C
Protection Degree	IP54
Material	UL 94 ABS
Size	250 x 250 x 112.2 mm.
Weight	2.13 kg.

DIMENSION

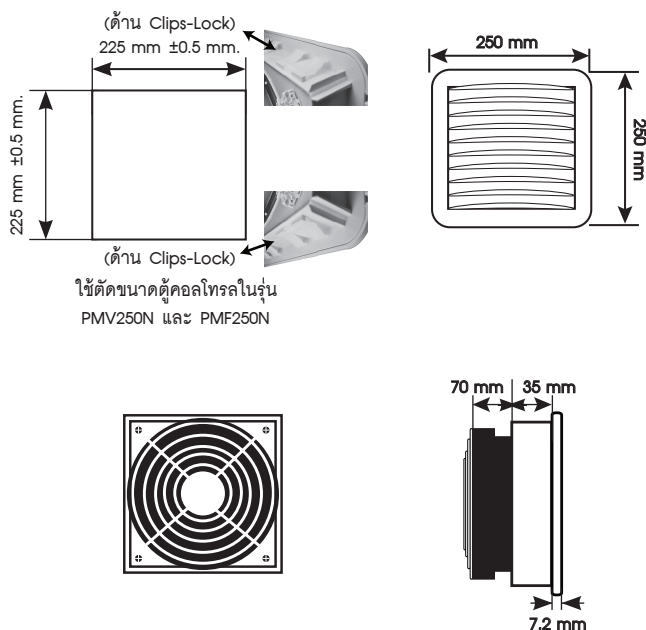


ACCESSORIES




PMF -

Size	
250N	250 X 250 mm ไขกับ PMV 250N



CMA-001



CMA-002

DESCRIPTION

- Fan to ventilation heat for electrical cabinet with Filter pad for filter out the dust into electrical cabinet or control cabinet.
- Wind speed at 511 m³/h
- Saving installation time with Clips Lock installation and maintenance time of Flap-Open to pull a fan cover off to change filter easier.
- Shape is designed to be beautiful and thin that made installation smooth with cabinet surface.
- There are suck air in and blow air out.
- Protection IP54.

OPERATION


Cabinet Filter Fan is ventilation fan for exchange heat for electrical cabinet, control cabinet. There are suck air in and blow air out by designed to has beautiful shape cover. It made installation smooth with cabinet surface (Example picture A).

And it has strong, fast and easy installation with Clips-Lock by the proper design. The products material is flexible plastic which is difference from fan case that is solid and difficult to adhere so our fans do not vibrate (Example B).

Easy to change dust filters from our designed "Flap-Open" that user can pull the cover off and push it back in the same place (Example C).

Spring Terminals made wiring easier and fast (Example D).

Normally, heat ventilation the heat air will float from bottom to the top so cabinet filter fan should install on top of cabinet by cover with filter pad stick in below area for being ventilation the air come inside cabinet. (Exempl picture E).

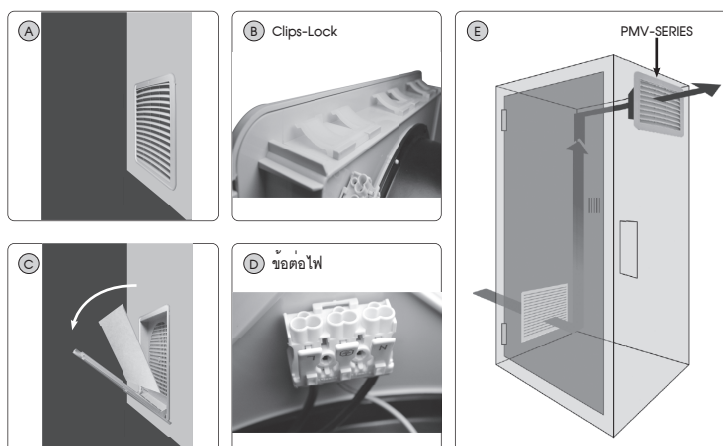

Accessory is Analog thermostat in Analog model CMA-001 and digital model CMA-002 for connect fan for long life saving by command fan to operate in temperature only.

ORDERING CODE


Size		Wind Direction		Power Supply Voltage	
250	250 x 250 mm.	A	Pull air in	110	110 VAC (For model PMV115N/PMV205N)
		P	Blow air out	220	220 VAC (All Model)



TECHNICAL SPECIFICATION คุณสมบัติทางเทคนิค

Power Supply	220 VAC 50 Hz
Power consumption	87 Watt / 0.4 Amp
Air Volume	927 m ³ /h 545 (CFM)
Sound Level	80 dB(A)
Ambient operation	60 °C
Protection Degree	IP55
Material	UL 94 ABS
Size	320 x 320 x 137.2 mm.
Weight	3.15 kg.

DIMENSION

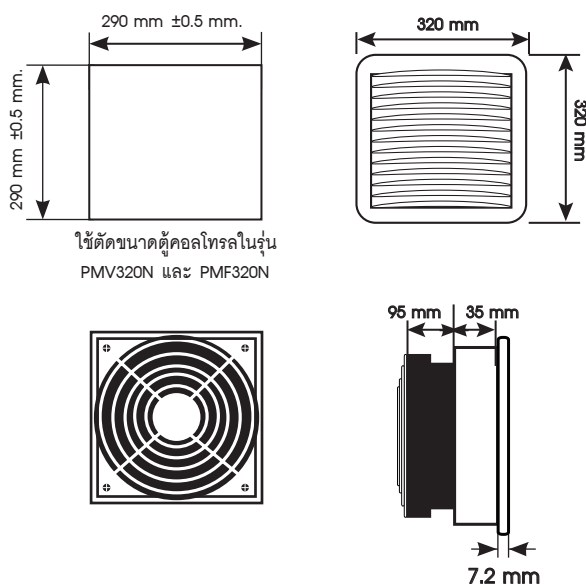


ACCESSORIES



PMF -	Size
320N	320x320 mm. ใช้กับ PMV 320N



CMA-001



CMA-002

DESCRIPTION

- Fan to ventilation heat for electrical cabinet with Filter pad for filter out the dust into electrical cabinet or control cabinet.
- Wind speed at 927 m³/h
- Saving installation time with Clips Lock installation and maintenance time of Flap-Open to pull a fan cover off to change filter easier.
- Shape is designed to be beautiful and thin made installation smooth with cabinet surface.
- There are suck air in and blow air out.
- Protection IP55.

OPERATION


Cabinet Filter Fan is ventilation fan for exchange heat for electrical cabinet, control cabinet. There are suck air in and blow air out by designed to has beautiful shape cover. It made installation smooth with cabinet surface (Example picture A).

And it has strong, fast and easy installation with Clips-Lock by the proper design. The products material is flexible plastic which is difference from fan case that is solid and difficult to adhere so our fans do not vibrate (Example B).

Easy to change dust filters from our designed "Flap-Open" that user can pull the cover off and push it back in the same place (Example C).

Spring Terminals made wiring easier and fast (Example D).

Normally, heat ventilation the heat air will float from bottom to the top so cabinet filter fan should install on top of cabinet by cover with filter pad stick in below area for being ventilation the air come inside cabinet. (Exempl picture E).

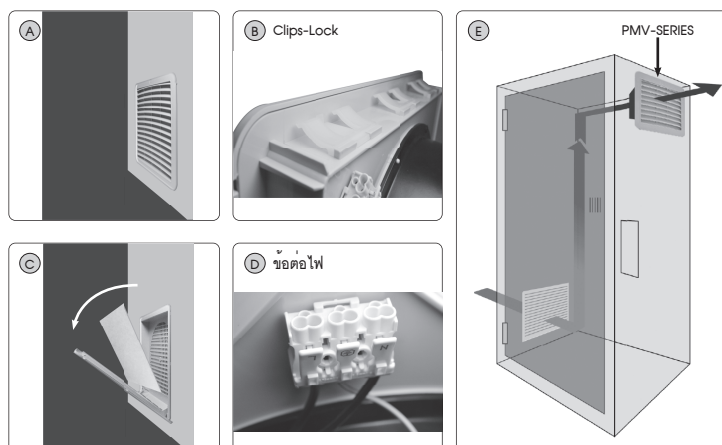

Accessory is Analog thermostat in Analog model CMA-001 and digital model CMA-002 for connect fan for long life saving by command fan to operate in temperature only.

ORDERING CODE

• พัดลม	PMV	Size	Wind Direction	Power Supply Voltage
		320	A Pull air in P Blow air out	110 220
		320 x 320 mm.		110 VAC (For model PMV115N/PMV205N) 220 VAC (All Model)



บริษัท ไพรมัส จำกัด (สาขา 00012)

เลขประจำตัวผู้เสียภาษี : 0105536011803

118/60 หมู่ที่ 18 ตำบลคลองหนึ่ง อำเภอคลองหลวง จังหวัดปทุมธานี 12120

118/60 Moo 18 Khlong Nueng, Khlong Luang, Pathum Thani 12120

Tel : 0-2693-7005 Fax : 02-147-4206 HotLine : 090-197-9601

E-mail : sales@primusthai.com, www.primusthai.com, www.pm.co.th